

# LED

## SURFACE MOUNTED CYLINDRICAL LIGHT



### Application Areas

- Residential
- Hotels
- Hospitality
- Commercial
- Offices
- Corridors

— Surface

Colour Rendering Index  
≥90

IP Rating  
IP44

**3**  
YEARS  
WARRANTY Standard Warranty



## Product Features


- Beam angle, 24 degree
- Die - cast aluminum, finished with liquid painting for excellent texture.
- The simple and elegant appearance enhance personalized taste to the space.
- 220-240 V constant voltage LED modules
- Luminous flux: up to 900 lm
- Beam angle: 24°
- Color rendering index  $R_a$ :90
- Average lifetime (L70 B50): 50,000 h (temperature at  $T_a=55^{\circ}\text{C}$ )
- Type of protection: IP44
- Anti - glare control provides the maximized visual comfort for the environment.
- Life span 50000 hours

## Product Information

LED Surface Mounted Cylindrical Light		OT-DL 10W
Technical Data	Wattage (W)	10W
	Voltage range	220 -240VAC
	Power factor	> 0.9
	Lamp type	COB - OSRAM CHIP
	Line frequency	50/60Hz
	Colour Temperature	3000K, 4000K, 6500K
	Rated Luminaire Efficiency	900 lm
	Size	Ø 75x90mm
	Protection class	Class I
	Beam Angle	24°
	IP Rating	IP44
	CRI	90
	Operating temperature	-20 ~ +40°C
	Storage temperature	-30 ~ +50°C
	Material	Die - cast aluminum, finished with liquid painting for excellent texture.
	Finish	Clear
	Life Span	50000 Hours
	Warranty	3 Years
	Applications	Residential, Commercial, Hospitality etc.



## Drawing and Dimensions

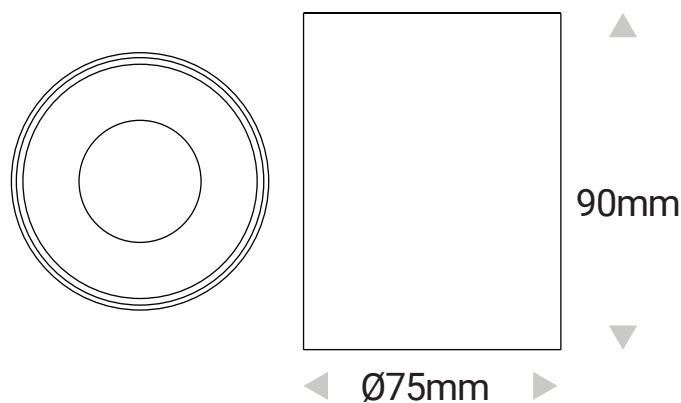

## Lightsource Test Report

