

VENTO SERIES

LED RECESSED LINEAR LIGHT

OTSEN RECESSED LINEAR LIGHT

OTSEN VENTO recessed linear light can be customized with a Tridonic module and Tridonic driver for superior performance. By using a CRI of 90 or higher, the light will ensure accurate color rendering, making it ideal for environments requiring precise lighting quality. The use of Tridonic components ensures reliability and energy efficiency, and the system can be designed to deliver higher lumens for enhanced brightness, depending on the specific requirements of the project. Custom dimming options such as DALI and 1-10V can also be incorporated for seamless control over the lighting atmosphere.

Application Areas

- Office space
- Retail Store
- Healthcare Facilities
- Residential Project
- Hotels

TRIDONIC
MODULE

TRIDONIC
DRIVER




Product Features

- High CRI
- Tridonic Module and Driver
- Energy Efficient
- Easy Installation and Maintenance
- Long lifespan of 50,000 hours, ensuring reliable performance.
- IP44 rated for outdoor use, with a 5-year warranty for added durability.

Product & Information

Luminaire Details	Product Name	OTSEN-VENTO-RECESSED LINEAR LIGHT
	Product Type	LINEAR LIGHT
	Product code	OT-VN-RL
	Luminaire Type	SMD
	IP Rating	IP44
	Supply Voltage	220-240V
	Power W	20W, 30W, 32W, 40W, 42W, 50W/Mtr.
	Optics	120°
	Available CCT	3000K, 4000K, 5000K, 6000K
	CRI	>90
	Material	6063 Aluminium
	Module	Tridonic / Vossloh-Schwabe
	Product Size	35x40x56mm
	Storage Temperature (Ts)	-40°C to 60°C
	Lifetime	50000 Hrs

Product Detail

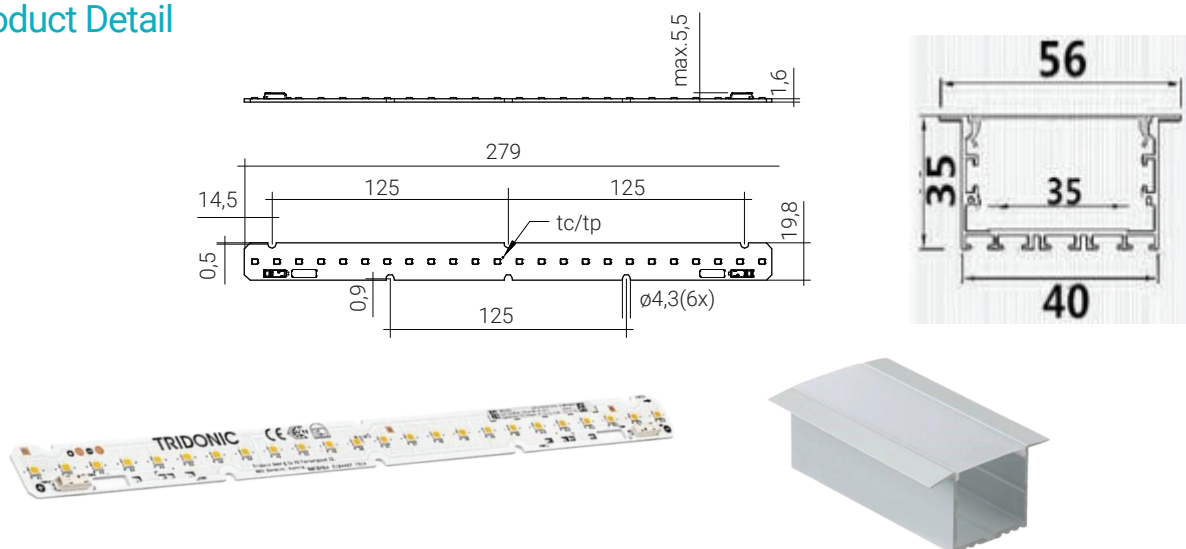



© 2023 OTSEN UK PVT. LTD. all rights reserved. OTSEN reserves the right to make changes in specifications and / or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.otsen.co.uk