



**8W  
LED  
SPOT LIGHT**

**OTSEN LED SPOT LIGHT**

The Otsen Siska spotlight, with features a newly enhanced design available in 7W, 12W, and 18W variants, delivering an impressive 120 lumens per watt. With a high CRI of 95, it ensures accurate and vibrant color rendering, making it ideal for settings that require precise lighting, such as galleries, retail spaces, or luxury interiors. Equipped with a reliable Tridonic driver and BRIDGELUX chip, the spotlight is designed for long-lasting performance. It offers versatile dimming options, supporting DALI, 1-10V, and Triac dimming protocols, ensuring compatibility with various lighting control systems. Additionally, the customizable beam angles allow for tailored light distribution, making it a flexible solution for different lighting applications.

**Application Areas**

- Residential
- Hotels
- Offices
- Shops
- Kitchen & Bathrooms
- corridors



## Product Features

- Very clean appearance design, provide a nice look.
- High lumen efficiency reach up to 100lm/W.
- Provide uniform light distribution ,the light is soft and comfortable .
- 85-240V input, PF>0.90, it's a flicker free product.
- OTSEN driver and Bridgelux chip
- 30,000H, 3 Years warranty .
- Flicker Free.
- Beam angle 38° 60°

## Product & Information

Luminaire Details	Product Name	OTSE LED SPOTLIGHT
	Product Type	Spot Light
	Luminaire Type	COB
	IP Rating	IP44
	Source brand	Bridgelux
	Luminaire Efficacy	100lm/W
	Available CCT	3000K, 4000K & 6500K
	CRI	>90
	McAdamBinning	Step 3
	Body Material	Aluminium Die Cast
	Storage Temperature (Ts)	-0°C to 50°C
	Ambient Temperature (Ta)	-0°C to 50°C
	Humidity	RH 10-90 %

## Product & Information





## Product Details

Model	Power(W)	Colour Temperature	Luminous / W	Size	Cutout Dimensions	Angle (Reflector)
OT-SLA-8W	8W	6500K, 4000K, 3000K	100LM/W	Dia 90xH45mm	Ø 75	38° 60°
OT-SLA-15W	15W	6500K, 4000K, 3000K	100LM/W	Dia 110xH55mm	Ø 95	38° 60°
OT-SLA-22W	22W	6500K, 4000K, 3000K	100LM/W	Dia 138xH70mm	Ø120	38° 60°
OT-SLA-40W	40W	6500K, 4000K, 3000K	100LM/W	Dia 160xH100mm	Ø145	38° 60°
OT-SLA-50W	50W	6500K, 4000K, 3000K	100LM/W	Dia 180xH110mm	Ø160	38° 60°



## Product Details

Model	Power(W)	Colour Temperature	Luminous / W	Size	Cutout Dimensions	Angle (Reflector)
OT-SLADR-8W	8W	6500K, 4000K, 3000K	100LM/W	Dia 90xH92mm	Ø 75	38° 60°
OT-SLADS-8W	8W	6500K, 4000K, 3000K	100LM/W	Dia 90xH92mm	Ø 75	38° 60°

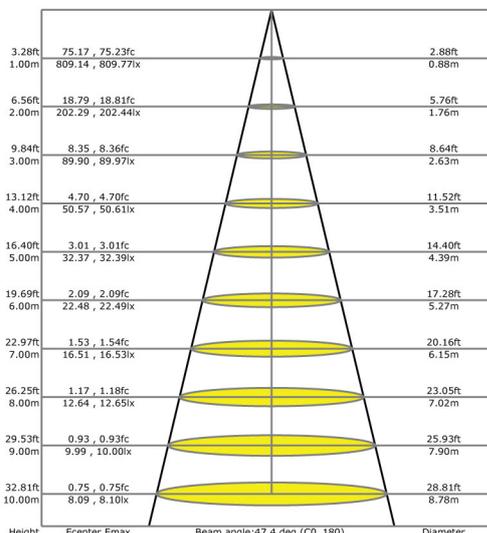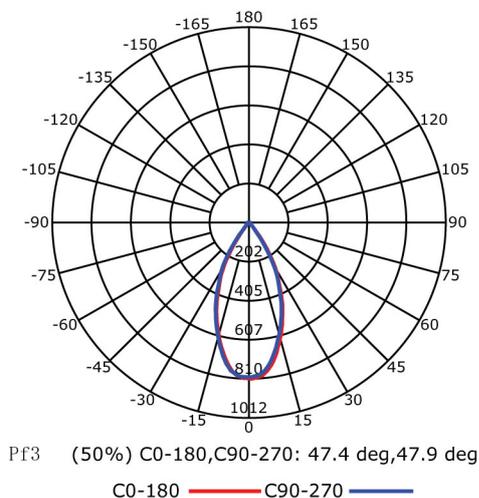



© 2023 OTSEN UK PVT. LTD. all rights reserved. OTSEN reserves the right to make changes in specifications and / or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

[www.otsen.co.uk](http://www.otsen.co.uk)